

(Full Mark = 8)

Tasks	Description	Marks																																																																																																																																																																					
1	<p style="text-align: center;">Table E2_1</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>θ (Deg)</th> <th>Voltage (mV)</th> <th>$\cos \theta$</th> </tr> </thead> <tbody> <tr><td>60.0</td><td>432</td><td>0.500</td></tr> <tr><td>59.5</td><td>426</td><td>0.508</td></tr> <tr><td>59.0</td><td>427</td><td>0.515</td></tr> <tr><td>58.5</td><td>431</td><td>0.522</td></tr> <tr><td>58.0</td><td>435</td><td>0.530</td></tr> <tr><td>57.5</td><td>438</td><td>0.537</td></tr> <tr><td>57.0</td><td>440</td><td>0.545</td></tr> <tr><td>56.5</td><td>440</td><td>0.552</td></tr> <tr><td>56.0</td><td>440</td><td>0.559</td></tr> <tr><td>55.5</td><td>438</td><td>0.566</td></tr> <tr><td>55.0</td><td>434</td><td>0.574</td></tr> <tr><td>54.5</td><td>430</td><td>0.581</td></tr> <tr><td>54.0</td><td>425</td><td>0.588</td></tr> <tr><td>53.5</td><td>423</td><td>0.595</td></tr> <tr><td>53.0</td><td>426</td><td>0.602</td></tr> <tr><td>52.5</td><td>431</td><td>0.609</td></tr> <tr><td>52.0</td><td>435</td><td>0.616</td></tr> <tr><td>51.5</td><td>437</td><td>0.623</td></tr> <tr><td>51.0</td><td>439</td><td>0.629</td></tr> <tr><td>50.5</td><td>439</td><td>0.636</td></tr> <tr><td>50.0</td><td>438</td><td>0.643</td></tr> <tr><td>49.5</td><td>437</td><td>0.649</td></tr> <tr><td>49.0</td><td>431</td><td>0.656</td></tr> <tr><td>48.5</td><td>428</td><td>0.663</td></tr> <tr><td>48.0</td><td>424</td><td>0.669</td></tr> <tr><td>47.5</td><td>421</td><td>0.676</td></tr> <tr><td>47.0</td><td>422</td><td>0.682</td></tr> <tr><td>46.5</td><td>425</td><td>0.688</td></tr> <tr><td>46.0</td><td>430</td><td>0.695</td></tr> <tr><td>45.5</td><td>433</td><td>0.701</td></tr> <tr><td>45.0</td><td>435</td><td>0.707</td></tr> <tr><td>44.5</td><td>436</td><td>0.713</td></tr> <tr><td>44.0</td><td>437</td><td>0.719</td></tr> <tr><td>43.5</td><td>436</td><td>0.725</td></tr> <tr><td>43.0</td><td>434</td><td>0.731</td></tr> <tr><td>42.5</td><td>431</td><td>0.737</td></tr> <tr><td>42.0</td><td>425</td><td>0.743</td></tr> <tr><td>41.5</td><td>424</td><td>0.749</td></tr> <tr><td>41.0</td><td>420</td><td>0.755</td></tr> <tr><td>40.5</td><td>419</td><td>0.760</td></tr> <tr><td>40.0</td><td>420</td><td>0.766</td></tr> <tr><td>39.5</td><td>424</td><td>0.772</td></tr> <tr><td>39.0</td><td>428</td><td>0.777</td></tr> <tr><td>38.5</td><td>431</td><td>0.783</td></tr> <tr><td>38.0</td><td>433</td><td>0.788</td></tr> <tr><td>37.5</td><td>434</td><td>0.793</td></tr> <tr><td>37.0</td><td>434</td><td>0.799</td></tr> <tr><td>36.5</td><td>434</td><td>0.804</td></tr> <tr><td>36.0</td><td>433</td><td>0.809</td></tr> <tr><td>35.5</td><td>431</td><td>0.814</td></tr> <tr><td>35.0</td><td>429</td><td>0.819</td></tr> <tr><td>34.5</td><td>426</td><td>0.824</td></tr> <tr><td>34.0</td><td>422</td><td>0.829</td></tr> <tr><td>33.5</td><td>419</td><td>0.834</td></tr> </tbody> </table>	θ (Deg)	Voltage (mV)	$\cos \theta$	60.0	432	0.500	59.5	426	0.508	59.0	427	0.515	58.5	431	0.522	58.0	435	0.530	57.5	438	0.537	57.0	440	0.545	56.5	440	0.552	56.0	440	0.559	55.5	438	0.566	55.0	434	0.574	54.5	430	0.581	54.0	425	0.588	53.5	423	0.595	53.0	426	0.602	52.5	431	0.609	52.0	435	0.616	51.5	437	0.623	51.0	439	0.629	50.5	439	0.636	50.0	438	0.643	49.5	437	0.649	49.0	431	0.656	48.5	428	0.663	48.0	424	0.669	47.5	421	0.676	47.0	422	0.682	46.5	425	0.688	46.0	430	0.695	45.5	433	0.701	45.0	435	0.707	44.5	436	0.713	44.0	437	0.719	43.5	436	0.725	43.0	434	0.731	42.5	431	0.737	42.0	425	0.743	41.5	424	0.749	41.0	420	0.755	40.5	419	0.760	40.0	420	0.766	39.5	424	0.772	39.0	428	0.777	38.5	431	0.783	38.0	433	0.788	37.5	434	0.793	37.0	434	0.799	36.5	434	0.804	36.0	433	0.809	35.5	431	0.814	35.0	429	0.819	34.5	426	0.824	34.0	422	0.829	33.5	419	0.834	<p>TOTAL = 1.0 points</p> <p>0.6 points for two columns filled with values of θ and the voltage</p> <p>0.2 points for including units</p> <p>0.2 points for displaying the measurements with the correct number of significant figures</p> <p>[-0.1 points for each unit missing</p> <p>-0.1 points for displaying the incorrect number of significant figures for two or more variables</p> <p>-0.1 points for angular step $\delta\theta > 2^\circ$</p>
θ (Deg)	Voltage (mV)	$\cos \theta$																																																																																																																																																																					
60.0	432	0.500																																																																																																																																																																					
59.5	426	0.508																																																																																																																																																																					
59.0	427	0.515																																																																																																																																																																					
58.5	431	0.522																																																																																																																																																																					
58.0	435	0.530																																																																																																																																																																					
57.5	438	0.537																																																																																																																																																																					
57.0	440	0.545																																																																																																																																																																					
56.5	440	0.552																																																																																																																																																																					
56.0	440	0.559																																																																																																																																																																					
55.5	438	0.566																																																																																																																																																																					
55.0	434	0.574																																																																																																																																																																					
54.5	430	0.581																																																																																																																																																																					
54.0	425	0.588																																																																																																																																																																					
53.5	423	0.595																																																																																																																																																																					
53.0	426	0.602																																																																																																																																																																					
52.5	431	0.609																																																																																																																																																																					
52.0	435	0.616																																																																																																																																																																					
51.5	437	0.623																																																																																																																																																																					
51.0	439	0.629																																																																																																																																																																					
50.5	439	0.636																																																																																																																																																																					
50.0	438	0.643																																																																																																																																																																					
49.5	437	0.649																																																																																																																																																																					
49.0	431	0.656																																																																																																																																																																					
48.5	428	0.663																																																																																																																																																																					
48.0	424	0.669																																																																																																																																																																					
47.5	421	0.676																																																																																																																																																																					
47.0	422	0.682																																																																																																																																																																					
46.5	425	0.688																																																																																																																																																																					
46.0	430	0.695																																																																																																																																																																					
45.5	433	0.701																																																																																																																																																																					
45.0	435	0.707																																																																																																																																																																					
44.5	436	0.713																																																																																																																																																																					
44.0	437	0.719																																																																																																																																																																					
43.5	436	0.725																																																																																																																																																																					
43.0	434	0.731																																																																																																																																																																					
42.5	431	0.737																																																																																																																																																																					
42.0	425	0.743																																																																																																																																																																					
41.5	424	0.749																																																																																																																																																																					
41.0	420	0.755																																																																																																																																																																					
40.5	419	0.760																																																																																																																																																																					
40.0	420	0.766																																																																																																																																																																					
39.5	424	0.772																																																																																																																																																																					
39.0	428	0.777																																																																																																																																																																					
38.5	431	0.783																																																																																																																																																																					
38.0	433	0.788																																																																																																																																																																					
37.5	434	0.793																																																																																																																																																																					
37.0	434	0.799																																																																																																																																																																					
36.5	434	0.804																																																																																																																																																																					
36.0	433	0.809																																																																																																																																																																					
35.5	431	0.814																																																																																																																																																																					
35.0	429	0.819																																																																																																																																																																					
34.5	426	0.824																																																																																																																																																																					
34.0	422	0.829																																																																																																																																																																					
33.5	419	0.834																																																																																																																																																																					

33.0	417	0.839
32.5	417	0.843
32.0	419	0.848
31.5	421	0.853
31.0	424	0.857
30.5	427	0.862
30.0	429	0.866
29.5	430	0.870
29.0	431	0.875
28.5	432	0.879
28.0	431	0.883
27.5	431	0.887
27.0	430	0.891
26.5	429	0.895
26.0	427	0.899
25.5	425	0.903
25.0	421	0.906
24.5	419	0.910
24.0	416	0.914
23.5	414	0.917
23.0	414	0.921
22.5	414	0.924
22.0	415	0.927
21.5	416	0.930
21.0	419	0.934
20.5	421	0.937
20.0	423	0.940
19.5	424	0.943
19.0	426	0.946
18.5	427	0.948
18.0	427	0.951
17.5	428	0.954
17.0	428	0.956
16.5	429	0.959
16.0	428	0.961
15.5	428	0.964
15.0	428	0.966
14.5	427	0.968
14.0	427	0.970
13.5	426	0.972
13.0	425	0.974
12.5	423	0.976
12.0	423	0.978
11.5	422	0.980
11.0	420	0.982
10.5	419	0.983
10.0	418	0.985
9.5	417	0.986
9.0	416	0.988
8.5	416	0.989
8.0	414	0.990
7.5	413	0.991
7.0	413	0.993
6.5	413	0.994
6.0	412	0.995
5.5	411	0.995
5.0	410	0.996
4.5	-	-
4.0	-	-

Reflection intensity against incident angle taken from $\theta \sim 4^\circ$ to 60° in 0.5° intervals on one (LHS) side of the angular scale. The independent variable $\cos \theta$ should be added to Table E2_1. (The Ti-coated etalon used is #15.)

2

Table E2_2

θ (Deg)	Voltage (mV)	$\cos \theta$
-60.0	426	0.500
-59.5	432	0.508
-59.0	437	0.515
-58.5	439	0.522
-58.0	441	0.530
-57.5	441	0.537
-57.0	440	0.545
-56.5	438	0.552
-56.0	434	0.559
-55.5	426	0.566
-55.0	421	0.574
-54.5	421	0.581
-54.0	427	0.588
-53.5	432	0.595
-53.0	435	0.602
-52.5	438	0.609
-52.0	439	0.616
-51.5	439	0.623
-51.0	437	0.629
-50.5	434	0.636
-50.0	429	0.643
-49.5	422	0.649
-49.0	418	0.656
-48.5	420	0.663
-48.0	425	0.669
-47.5	431	0.676
-47.0	434	0.682
-46.5	436	0.688
-46.0	436	0.695
-45.5	436	0.701
-45.0	436	0.707
-44.5	433	0.713
-44.0	431	0.719
-43.5	426	0.725
-43.0	421	0.731
-42.5	413	0.737
-42.0	417	0.743
-41.5	420	0.749
-41.0	423	0.755
-40.5	428	0.760
-40.0	431	0.766
-39.5	431	0.772
-39.0	433	0.777
-38.5	432	0.783
-38.0	433	0.788
-37.5	431	0.793
-37.0	422	0.799
-36.5	425	0.804
-36.0	417	0.809
-35.5	416	0.814
-35.0	414	0.819
-34.5	414	0.824
-34.0	419	0.829
-33.5	421	0.834
-33.0	425	0.839
-32.5	427	0.843
-32.0	428	0.848

TOTAL = 1.0 points

0.6 points for two columns filled with values of θ and the voltage

0.2 points for including units

0.2 points for displaying the measurements with the correct number of significant figures

[-0.1 points for each unit missing

-0.1 points for displaying the incorrect number of significant figures for two or more variables


-0.1 points for angular step $\theta > 2^\circ$

-31.5	430	0.853
-31.0	431	0.857
-30.5	432	0.862
-30.0	431	0.866
-29.5	430	0.870
-29.0	428	0.875
-28.5	427	0.879
-28.0	424	0.883
-27.5	421	0.887
-27.0	418	0.891
-26.5	415	0.895
-26.0	413	0.899
-25.5	413	0.903
-25.0	413	0.906
-24.5	416	0.910
-24.0	418	0.914
-23.5	420	0.917
-23.0	422	0.921
-22.5	424	0.924
-22.0	426	0.927
-21.5	427	0.930
-21.0	428	0.934
-20.5	428	0.937
-20.0	429	0.940
-19.5	429	0.943
-19.0	428	0.946
-18.5	429	0.948
-18.0	428	0.951
-17.5	427	0.954
-17.0	426	0.956
-16.5	425	0.959
-16.0	423	0.961
-15.5	422	0.964
-15.0	419	0.966
-14.5	418	0.968
-14.0	416	0.970
-13.5	414	0.972
-13.0	414	0.974
-12.5	413	0.976
-12.0	412	0.978
-11.5	411	0.980
-11.0	411	0.982
-10.5	411	0.983
-10.0	411	0.985
-9.5	412	0.986
-9.0	412	0.988
-8.5	413	0.989
-8.0	414	0.990
-7.5	414	0.991
-7.0	415	0.993
-6.5	416	0.994
-6.0	416	0.995
-5.5	417	0.995
-5.0	418	0.996
-4.5	426	0.997
-4.0	425	0.998


Reflection intensity against incident angle taken from $\theta \sim -4^\circ$ to -60° in 0.5° intervals on the (RHS) other side of the angular scale. The independent variable $\cos \theta$ should be added to Table E2_2. (The Ti-coated etalon used is #15.)

3

Graph E2_1

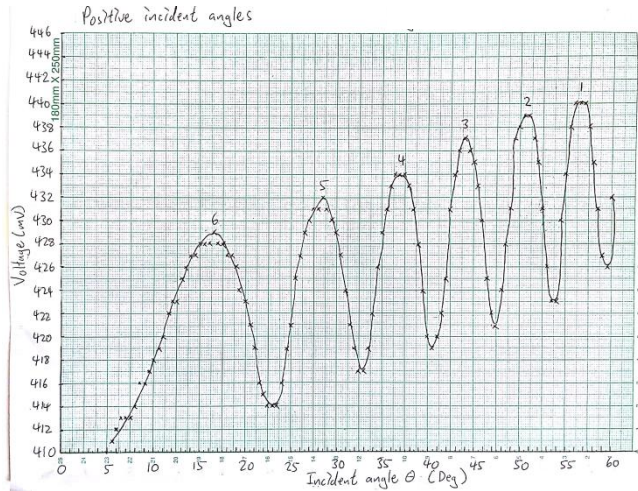

Graph E2_2

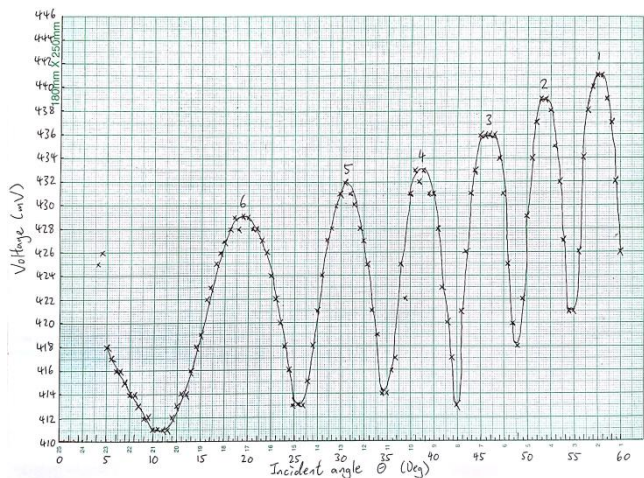

Graphs E2_1 and E2_2 show the relationship between the intensity and $|\theta|$ for the positive (LHS) and negative (RHS) incident angles respectively. The peak numbers are also labeled for all graphs.

TOTAL = 0.9 points

0.4 points for displaying the data points (for both graphs)

0.1 points for displaying the units (for both graphs)

0.1 points for displaying the axis label (for both graphs)

0.1 points for displaying the axis ticks label (for both graphs)

0.2 points for smooth curve (for both graphs)

[deduct half of the points if the above items are not shown in both graphs]

4	Refer to Graphs E2_1 and E2_2.	<p>TOTAL = 0.2 points</p> <p>0.2 points for labeling the peaks with appropriate peak numbers (for both graphs)</p> <p>[-0.1 points for wrong peak number order]</p>
5	<p>From Equation (1), the peaks correspond to constructive interference where the total phase difference of the two beams is equal to multiples of 2π, i.e.</p> $2kL\cos\theta_m + \phi_s = 2m\pi, \quad (2)$ <p>where $m = 1, 2, \text{etc...}$ is the interference order and θ_m is the corresponding incident angle for peak reflection intensity.</p> <p>Thus a plot of the interference order m vs. $\cos \theta_m$ will give a straight line with a slope related to the air-gap spacing L and an intercept related to the reflection phase ϕ_s. Since the interference order changes sequentially with the peak number, a plot of the peak number vs. $\cos \theta$ will also give a straight line with the same slope as the plot for the interference order vs. $\cos \theta$. However, the y-intercept is now shifted along the y-axis with respect to the plot for the interference order vs. $\cos \theta$.</p> <p>Thus $X(\theta) = \cos(\theta)$ should be chosen as the independent variable such that the intensity peaks will be evenly spaced in a plot of reflection intensity vs. $\cos(\theta)$. Furthermore, a plot of peak number vs. $\cos(\theta)$ will give a straight line that can be used to obtain the air-gap spacing L of the Ti-coated etalon and also the reflection phase ϕ_s of the Ti.</p>	<p>TOTAL = 0.3 points</p> <p>0.2 points for deriving the correct equation (i.e. Eq.(2))</p> <p>0.1 points for m equals to integer number</p>
6	Independent variable $X(\theta) = \cos(\theta)$ Refer to Tables E2_1 and E2_2	<p>TOTAL = 0.4 points</p> <p>0.2 points for correct independent $X(\theta)$</p> <p>0.2 points for working out the numbers of $X(\theta)$ in Tables E2_1 and E2_2</p>

7 Ideally, the locations of the peaks for (RHS) negative incident angles should be the same as for (LHS) positive incident angles for perfect optical alignment. Since there could be an offset in the locations of the peaks due to mis-alignment in the optics, the peak locations are better determined by averaging the negative and positive incident angles. After pairing, one would get the following table:

Table E2_3

Peak number (LHS)	θ_{LHS} (Deg)	Peak number (RHS)	θ_{RHS} (Deg)	$ \theta _{average}$ (Deg)	$\cos \theta _{average}$	m
6	16.50	6	-19.25	17.875	0.952	11
5	28.50	5	-30.75	29.625	0.869	10
4	36.50	4	-38.50	37.500	0.793	9
3	44.00	3	-45.75	44.875	0.709	8
2	51.25	2	-51.75	51.500	0.623	7
1	56.50	1	-57.75	57.125	0.543	6

θ_{LHS} refers to the peak location obtained from Table E2_1.
 θ_{RHS} refers to the peak location obtained from Table E2_2.
 $|\theta|_{average}$ is the average of $|\theta|_{LHS}$ and $|\theta|_{RHS}$.

TOTAL = 0.6 points

0.2 points for identifying the peaks and the corresponding LHS/RHS incident angles


0.2 points for matching of peaks

0.2 points for calculating the average of the independent variable

[-0.1 points for each unit missing

-0.1 points for displaying the incorrect number of significant figures except for peak and interference numbers

-0.1 points for mis-matching peak number]

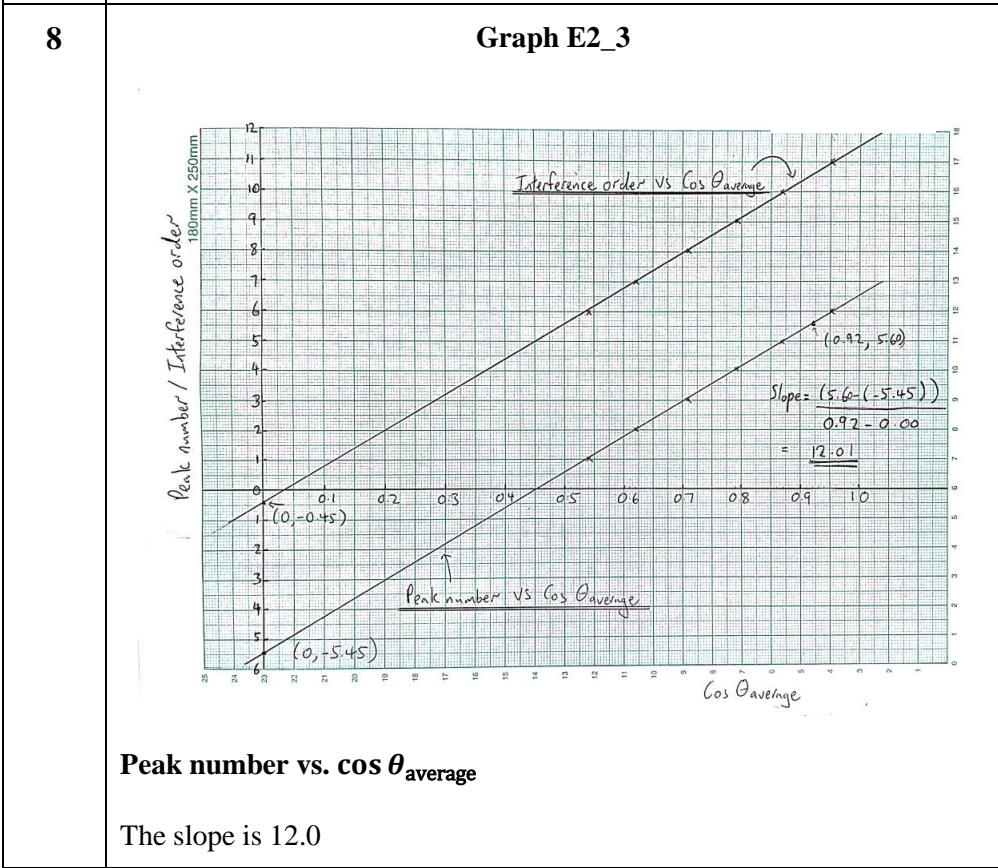

TOTAL = 0.6 points

0.3 points for displaying the data points

0.1 points for displaying the units

0.1 points for displaying the axis label

0.1 points for displaying the axis ticks label

[-0.2 points for plotting $\cos \theta$ vs. peak number or interference order (i.e. x-y axis are reserved)]

The y-intercept is -5.45

Interference order vs. $\cos \theta_{\text{average}}$

The slope is 12.0


The y-intercept is -0.45

By plotting peak number against $\cos |\theta|_{\text{average}}$ and drawing a line through the data points, one could get the slope and the y-intercept, as shown in Graph E2_3. The same principle applies to plotting the interference order m against $\cos |\theta|_{\text{average}}$.


(Graphical solutions for the slope and intercept will be accepted.)

Note: Plotting these two graphs separately will also be acceptable as shown in Graph E2_3a and Graph E2_3b i.e.

Graph E2_3a

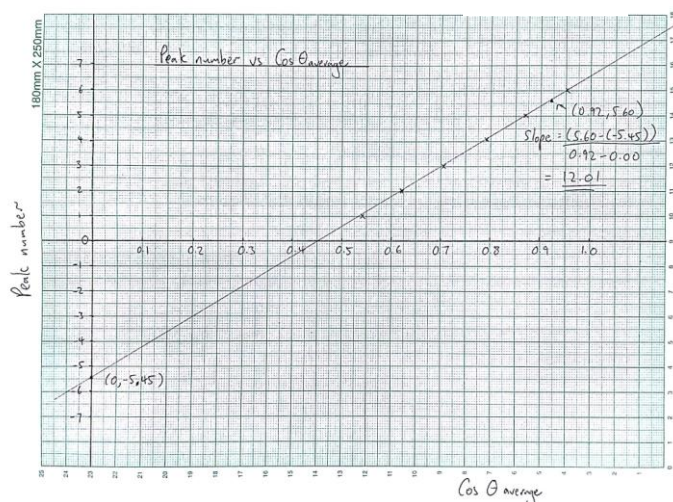

Graph E2_3b

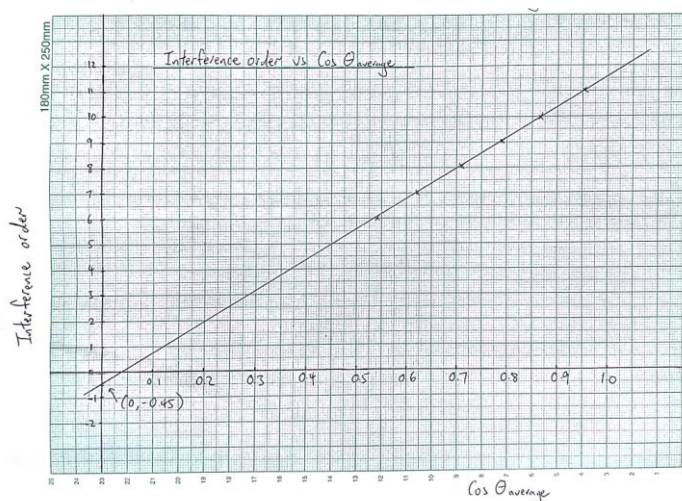


<p>9</p>	<p>Refer to Graph E2_3</p> <p>Peak number vs. $\cos \theta_{\text{average}}$</p> <p>The slope is 12.0 The y-intercept is -5.45</p>	<p>TOTAL = 0.4 points</p> <p>0.2 points for fitting a straight line</p> <p>0.1 points for deriving the value of the slope</p> <p>0.1 points for deriving the value of the y-intercept</p>
<p>10</p>	<p>Equation (2) in Tasks 5+6 can be rewritten in a simpler form for each constructive interference order m at incident angle θ_m as below:</p> $m = \frac{2L\cos\theta_m}{\lambda} + \frac{\phi_s}{2\pi} . \quad (3a)$ <p>In Equation (3a), one can take the integer part of $\frac{2L\cos\theta_m}{\lambda}$ as the interference order, i.e.</p> $m = \text{Trunc}\left(\frac{2L\cos\theta_m}{\lambda}\right) . \quad (3b)$ <p>Then the decimal part of $\frac{2L\cos\theta_m}{\lambda}$ is related to the reflection phase by</p> $\phi_{s,n} \equiv \frac{\phi_s}{2\pi} = \text{Trunc}\left(\frac{2L\cos\theta_m}{\lambda}\right) - \frac{2L\cos\theta_m}{\lambda} . \quad (3c)$ <p>A simpler method to find the interference order m is to add to the peak number directly the absolute value of the integer part of the y-intercept obtained from the plot of peak number vs. $\cos \theta$ as shown in Graph E2_3, i.e. $m = \text{peak number} + \text{integer part of y-intercept in Graph E2}_3$.</p> <p>Then, the y-intercept of a plot of m vs. $\cos \theta$ will give the normalized reflection phase $\phi_{s,n} = \phi_s/2\pi$ directly.</p> <p>$\phi_{s,n}$ is now defined within $(-1, 0)$, corresponding to ϕ_s chosen with $(-2\pi, 0)$.</p> <p>Refer to Table E2_3 for m.</p>	<p>TOTAL = 1.2 points</p> <p>0.3 points for deriving the correct equation (i.e. Eq. (3a))</p> <p>0.3 points for getting the expression for m (i.e. Eq. (3b))</p> <p>0.2 points for getting the expression for normalized reflection phase (i.e. Eq. (3c))</p> <p>0.2 points for defining the range for the reflection phase</p> <p>0.2 points for interference order added to Table E2_3.</p>

11	<p>Refer to Graph E2_3:</p> <p>From Graph E2_3, the slope for m vs, $\cos \theta$ is 12.01.</p> <p>Since slope of the line is equal to $2L/\lambda$, one can then obtain the value of L as</p> $L = \lambda \times \text{slope} / 2 = 0.650 \times \frac{12.01}{2} = 3.903 \mu \text{ m.}$ <p>The y-intercept is the normalized reflection phase</p> $\phi_{s,n} = -0.450 \text{ or } \phi_s = -2.828 \text{ rad.}$	<p>Total = 1.4 points</p> <p>0.4 points for displaying the data points</p> <p>0.3 points for fitting a straight line</p> <p>0.4 points for deriving the value of the air-gap spacing</p> <p>0.3 points for deriving the value of the y-intercept</p> <p>[-0.1 points for $\phi_{s,n}$ outside (-0.9, -0.1])</p>
-----------	---	--

Appendix:

Path difference calculation for an ideal air-gap etalon:



Path difference for beams 1 and 2 is equal to:

$$AB + BC - AE = \frac{2L}{\cos \theta} - 2L \sin \theta \tan \theta = 2L \cos \theta. \quad (4a)$$

This is the path difference used in Equation (1).

It is also acceptable to calculate the path difference directly using Equation (1), but will only be given half of the points as writing down Eq. (4a).

 A mis-alignment of angle α between the laser beam and the angular scale

N/A

corresponds to a correction of α for the incident angle θ taken directly from the angular scale. Thus the incident angle is now $\theta + \alpha$. Hence the corrected path difference between beams 1 and 2 with a mis-alignment of angle α is:

$$AB + BC - AE = 2L \cos(\theta + \alpha). \quad (4b)$$

Thus the correction of the path difference for a mis-alignment of angle α as compared to the ideal case of perfect alignment is:

$$\Delta = 2L \cos(\theta) - 2L \cos(\theta + \alpha) \sim 2L \sin\theta \sin\alpha. \quad (4c)$$

Hence, the error for the reflection phase due to mis-alignment is $2\pi\Delta/\lambda$, or Δ/λ when normalized by 2π .

Now one can use $L = 5\mu\text{m}$, $\theta = 30^\circ$, and $\lambda = 0.650 \mu\text{m}$ to get the error for the reflection phase due to a $\alpha = 1^\circ$ mis-alignment by using Equation (4c):

The value of Δ by using Equation (4c) is:

$$\begin{aligned} \Delta &= 2 \times (5.00 \times 10^{-6}) \times \sin 30^\circ \times \sin 1^\circ \\ &= 0.0873 \times 10^{-6} \text{ m.} \end{aligned}$$

Now, the phase error is is $2\pi\Delta/\lambda$, or Δ/λ

$$\sigma_{\phi_S} = 2\pi \times (0.0873 \times 10^{-6}) / (0.650 \times 10^{-6}) = 0.843 \text{ rad,}$$

$$\sigma_{\bar{\phi}_S} = 0.134 \text{ (normalized by } 2\pi\text{).}$$